


FOCUS DISPLAY SOLUTIONS

WWW.FOCUSLCD.COM

FDS16x2(60.5x31.7)XBC

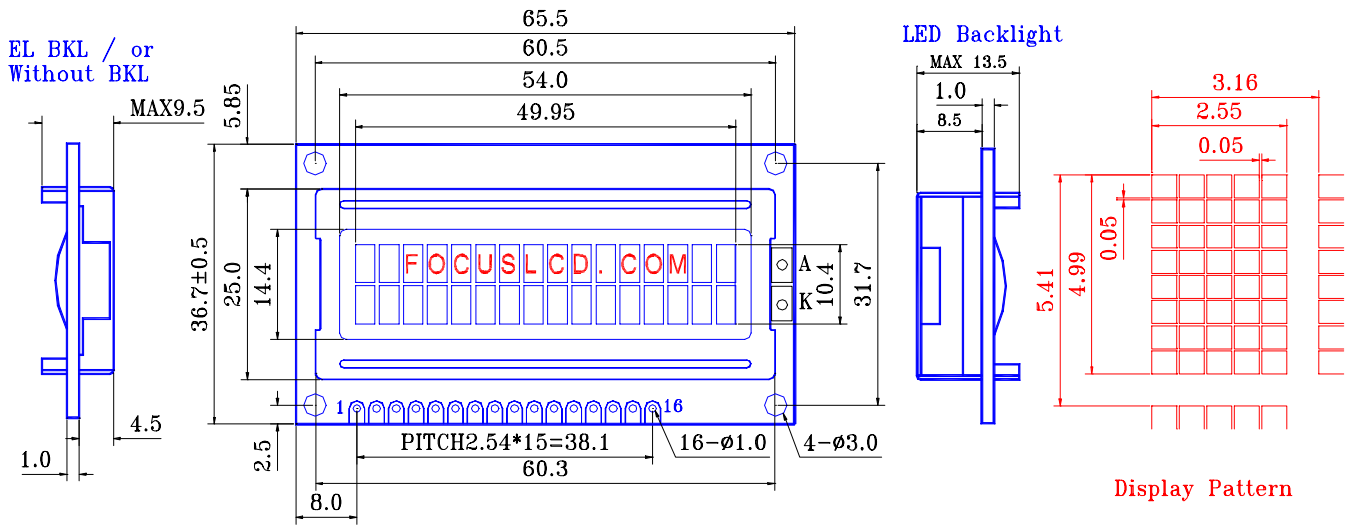

PERFORMANCE FEATURES	
LC FLUID:	TN,STN
POLARIZER:	REFLECTIVE, TRANSFLECTIVE
	TRANSMISSIVE
VIEWING ANGLE:	6:00
BACKLIGHT:	LED, YELLOW-GREEN
TEMPERATURE RANGE:	STANDARD, WIDE

PIN	SIGNAL	PIN	SIGNAL
1	VSS	9	DB2
2	VDD	10	DB3
3	V0	11	DB4
4	RS	12	DB5
5	R/W	13	DB6
6	E	14	DB7
7	DB0	15	LED+
8	DB1	16	LED-

Feature:

- 5x8 Dots with cursor
- Built-in controller (KS0066U or Equivalent)
- +5V power supply (also available for +3.0V)
- 1/16 duty cycle
- BKL to be driven by pin, pin2, or pin15, pin16 or A,K
- N.V. Optional

Interface Pin Connections

NO	SYM	LEVEL	FUNCTION	NO	SYM	LEVEL	FUNCTION
1	V _{SS}	-	GND	9	DB ₂	H/L	DATA BIT 2
2	V _{DD}	-	5V	10	DB ₃	H/L	DATA BIT 3
3	V _O	-	CONTRAST ADJUSTMENT	11	DB ₄	H/L	DATA BIT 4
4	RS	H/L	REGISTER SELECT	12	DB ₅	H/L	DATA BIT 5
5	R/W	H/L	READ/WRITE	13	DB ₆	H/L	DATA BIT 6
6	E	H/L	ENABLE SIGNAL	14	DB ₇	H/L	DATA BIT 7
7	DB ₀	H/L	DATA BIT0	15	A(+)	4.2V	BACKLIGHT
8	DB ₁	H/L	DATA BIT1	16	K(-)	0V	BACKLIGHT

Absolute Maximum Rating

ITEM	SYMBOL	MIN	TYP	MAX	UNIT
POWER SUPPLY	V _{DD} -V _{SS}	-0.3	---	5.5	V
INPUT VOLTAGE	V _I	-0.3	---	V _{DD}	

Electrical Characteristics

ITEM	SYM	CONDITION	MIN	TYP	MAX	UNIT
INPUT VOLTAGE	V _{DD}	+ 5V	4.7	5.0	5.5	V
		+3.3V	2.7	3.0	5.3	V
SUPPLY CURRENT	I _{DD}	V _{DD} = 5V	--	1.5	4	mA
RECOMMENDED LCD DRIVING VOLTAGE FOR NORMAL TEMPERATURE VERSION MODULE	V _{DD} -V _O	-20 C	----	---	---	V
		0 C	4.7	5.0	5.5	
		25 C	4.3	4.5	4.7	
		50 C	4.1	4.3	4.5	
		70 C	---	---	--	
LED FORWARD VOLTAGE	V _F	25 C	----	4.2	4.6	V
LED FORWARD CURRENT	I _F	25 C	---	120	---	mA
EL POWER SUPPLY CURRENT	I _{EL}	V _{EL} = 110V AC 400Hz	---	---	---	mA

Mechanical Data

ITEM	STANDARD	UNIT
MODULE DIMENSION	65.5X36.7	mm
VIEWING AREA	54.0X14.4	mm
DOT SIZE	0.47X0.58	mm
CHARACTER SIZE	2.55X4.99	mm

DISPLAY CHARACTER ADDRESS CODE:

Display position	1	2	3	4	5	6	--
DDRAM address	00	01	02	--	--	--	0FH
DDRAM address	40	41	42	--	--	--	4FH